
ภาคผนวก

- | | | |
|---------|---|---|
| ภาคผนวก | 1 | Reprint/Manuscript and Acceptance paper confirmation |
| ภาคผนวก | 2 | นำเสนอบทความวิจัย |
| ภาคผนวก | 3 | กราฟแสดงผลการวัดค่าความต้านทานเยื่อกรองในชุดการการทดลอง: กรณี Model suspension (สารละลายกรดฮิวมิก สารแขวนลอยอนุภาคเบนโทไนด์ สารแขวนลอยผงถ่านกัมมันต์ และสารผสมสองชนิด) |
| ภาคผนวก | 4 | กราฟแสดงการกระจายตัวของขนาดอนุภาคสารป้อน |
| ภาคผนวก | 5 | สเปกตรัม FTIR ของน้ำผิวดินและน้ำทิ้งหลังบำบัดจากระบบบำบัด |
| ภาคผนวก | 6 | ผลการประเมินเบื้องต้นทางเศรษฐศาสตร์ของระบบ |

ภาคผนวก 1



Reprint/Manuscript and Acceptance paper confirmation



Manuscript Details

Title: Influence of water compositions and conditioning on flux enhancement in an immersed membrane system
Journal: Separation Science and Technology
Article ID: 297569 (122)
Lead Author: Sridang
Corresponding Author: Sridang
Status: Final Production ([What's this?](#))
Production Editor: Colleen Franciscus ([Contact Production Editor](#))

Manuscript Checklist

-  Copyright A copyright agreement licensing us to publish this article has been received.
-  Proofreading Proof corrections for this article have been received.
[View Article Proofs](#)

Manuscript Options

Order Reprints: [Order reprints at a pre-publication discount](#)
iOpen Access: [What's this?](#) [Register for iOpen Access](#)

[Manuscripts List](#)

Trouble with this page? Contact CatsHelpDesk (catshelpdesk@tfinforma.com)

Separation Science and Technology, 43: 1813–1825, 2008
Copyright © Taylor & Francis Group, LLC
ISSN 0149-6395 print/1520-5754 online
DOI: 10.1080/01496390801974035



Influence of Water Compositions and Conditioning on Flux Enhancement in an Immersed Membrane System

P. Sridang,^{1,2} A. Grasmick,³ and U. Puetpaiboon¹

¹Faculty of Engineering, Department of Civil Engineering, Prince of Songkla University, Songkhla, Thailand

²Membrane Science and Technology Research Center, Prince of Songkla University, Songkhla, Thailand

³Laboratoire de Genie des Procédés Eau et Bioproduits, Université Montpellier II, France

Abstract: The objective was to quantify the importance of operational conditions, aeration, and physico-chemical conditioning on membrane fouling intensity. The suspension filterability was also analysed by using frontal filtration and a cake filtration model. Results pointed out the moderated role of aeration to reduce compound accumulation on the membrane surface. It did not appear as a determining criterion to prevent membrane fouling. In contrast, the physico-chemical conditioning appeared as a determining criterion to increase critical flux. According to the experimental conditions 200 l/m²/h/bar membrane permeability could be maintained transmembrane pressure (TMP) when filtering stored rainwater. This permeability value was 2–3 times higher than the values obtained without conditioning. Moreover, according to the low turbidity of such stored rainwater and because of the high selectivity of the membrane, the coagulation step, a very low amount of 10 mg/l FeCl₃, was sufficient to intensify the filtration step. This conditioning interest appeared less significant when filtering salted water in immersed membrane systems, but a 20 mg/l FeCl₃ addition appeared sufficient to double the value of critical flux. Nevertheless filtration

Received 2 September 2007, Accepted 9 February 2008

Address correspondence to P. Sridang, Faculty of Engineering, Department of Civil Engineering, Prince of Songkla University, Hat Yai, Songkhla 90112, Thailand. Tel.: 00-6-74-212891; E-mail: porntip.c@psu.ac.th

1814

P. Sridang et al.

in frontal mode pointed out the significant impact of physico-chemical conditioning in reducing the cake deposit hydraulic resistance.

Keywords: Clarification, coagulation, immersed membrane, membrane permeability, salted water

INTRODUCTION

Nowadays pressure driven membrane processes are widely applied for producing high water quality, whatever the water resource (1–2). Micro-ultrafiltration clarifies water technologically and replaces conventional water clarification by providing not only very good quality water, but also because it removes specific infectious contaminants including *Giardia* or *Cryptosporidium*. It is also strongly recommended as a pre-treatment step prior to Nanofiltration and Reverse Osmosis operations, highly sensitive to colloids and suspended solids causing bundle clogging. Micro-ultrafiltration may be carried on under highly flexible methodology including the frontal filtration mode or tangential mode when the suspensions contain a large range of compounds (3–6) obliging specific conditioning to minimize fouling (7). In water treatment most fouling is caused by suspended matter and colloid fractions deposit on the membrane surface or by pore blocking. Suspension conditioning such as coagulation-flocculation, adsorption, and oxidation steps are then favorable. Nevertheless according to raw water characteristics, it appears important to minimize the operating cost by optimizing conditioning, membrane module configuration, and hydrodynamics. Immersed membrane systems present several advantages such as selectivity and compactness due to the possibility of developing all the unitary steps of treatment (physico-chemical conditioning, PAC adsorption, separation) in the same tank. In addition, external membrane fouling can be controlled at low energy costs by practicing air injection close to the membrane bundles acting as a turbulence supplier and maintaining a high permeate flux level over relatively long operational periods, without any necessity of frequent chemical membrane cleaning (5, 6, 8). The objective of this work was to point out the role of aeration and physico-chemical conditioning when filtering stocked rainwater and salted water.

MATERIALS AND METHODS

Experimental Setup and Feed Water

The experiments were carried out on a lab-scale pilot (Fig. 1) where a hollow fiber bundle was directly immersed in a 35 liter tank. The immersed

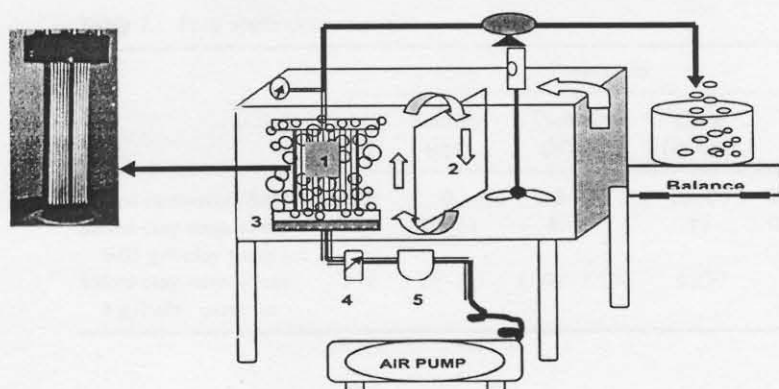


Figure 1. Schematic of a lab scale pilot Immersed Membrane System: (1) Capillary membrane module (2) Partition sheet (3) Air distributor (4) Air flow regulator and (5) Air filter connect with air pump.

membrane bundle was packed with polysulfone capillary fibers with a pore size of $0.1 \mu\text{m}$ and surface area of 0.1 m^2 . The characteristics of the membrane bundle used are given in Table 1. The aeration supply was provided by a distributor placed under the membrane module. The generated bubbles raised up throughout the fibre network and the suspension were also stirred by an impeller to avoid any particle settling. Transmembrane pressure (TMP) was monitored by a negative manometer sensor placed on the permeate pipe and connected with a computer data logger.

Raw stored rainwater and synthetic salted water, mixed with 0.05 and 5.0 g/l of clay particles, were used as feed suspensions. They contain part inorganic and organic suspended solids and also some natural soluble organic matter which correspond to the characteristics given in Table 2.

Table 1. Membrane characteristics

Specification	Values
Model	UFL 3
External diameter of fiber (mm)	2
Number of fibers	72
Fiber length (mm)	200
Filtration surface (m^2)	0.1
Specific surface area (m^2/m^3)	258
Pore size (μm)	0.1
Initial membrane resistance ($R_m, \text{m}^{-1}, 20^\circ\text{C}$)	$1.0\text{E} + 12$

1816

P. Sridang et al.

Table 2. Feed water characteristics

Type	Parameters				
	pH	Salinity (ppt)	Turbidity (NTU)	Color (Pt-Col)	UV-254 (Abs)
Stored rainwater (Srw)	7–8	0	2–5	10–20	0.11–0.14
Salted clay susp. (Scs): 0.05 g/l-clay particles	7–8	29–31	8–10	12	0.04–0.06
Salted clay susp. (Scs): 5 g/l-clay particles	7–8	29–31	1,000–1,100	1,250	Not analysed

Operating Conditions and Membrane Fouling Prediction

The operating conditions were set up to determine the effect of aeration and coagulation on critical flux values to optimize continuous membrane separation and to evaluate fouling potential by examining raw suspensions filterability.

The pH was adjusted by adding caustic or acid solutions to be maintained in the neutral range. The temperature of feed suspension was maintained at room temperature (25–28°C). The initial permeability of the membrane module was also evaluated. The membrane performance and notably the critical flux were investigated according to the critical flux step method (9). During the continuous experimental runs, permeate recirculation was maintained with the objective of keeping the concentration of suspensions constant all along the experimental run. Different types of coagulants FeCl₃, Alum and PACl (Polyaluminiumchloride), were used and compared in terms of membrane fouling intensity. To optimize the coagulant addition some runs were carried on in a Jar Test procedure (150 rpm rapid mixing for 1 minute, 40 rpm slow mixing for 30 minutes, and then 30 minutes of settling). Table 3 gives the optimal dose found for each reagent.

Table 3. Optimal dose of coagulant in Jar test runs

Feed suspensions tested	Optimal doses obtained (mg/l)		
	FeCl ₃	Alum	PACl
Stored rainwater (Srw)	20	50	10
Salted clay suspension (Scs): 0.05 g/l clay particles	20	100	not analysed
Salted clay suspension (Scs): 5.0 g/l clay particles	20	100	not analysed

Water Compositions and Conditioning on Flux Enhancement

1817

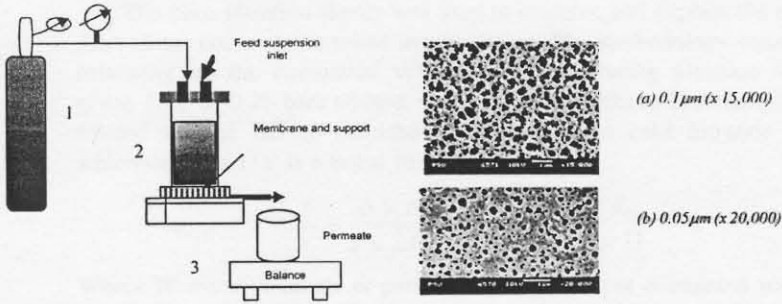


Figure 2. Schematic diagram of frontal filtration unit and membrane surface by SEM: (1) = N_2 tank equipped with pressure regulator (2) = Pressurized filtration cell and (3) = Balance and permeate receiver.

A specific membrane cleaning procedure was practiced with different cleaning periods: rinsing with water, back washing with a 1 wt.% citric acid solution at low $15 \text{ l/m}^2/\text{h}$ rates for 60 minutes. Membranes were then directly immersed in a 1 wt.% sodium hydroxide solution for 120 minutes. The membrane permeability was measured after each cleaning step by filtering tap water to evaluate the cleaning step performance.

The filterability and fouling potential of raw suspensions were analyzed by using a frontal filtration mode in a specific filtration cell described in Fig. 2. The unit consisted of a 150 ml pressurized filtration cell equipped with plane organic membranes. The characteristics of membranes are given in Table 4 and two photos of used membranes are given in Fig. 2.

Table 4. Plane membrane characteristics

Membrane material	Type	
	VMWP 04700 Millipore plane nitrocellulose	VCWP 04700 Milli- pore plane mixed cellulose ester
Dimension (mm, diameter)	47	47
Filtration area (cm^2)	11.3	11.3
Pore size (μm)	0.05	0.1
Filtration layer		
- Porosity (%)	72	74
- Thickness (μm)	105	105
Water permeability (20°C , 1 bar) ($\text{l}^{-1} \text{h}^{-1} \text{m}^2$)	400	800
Membrane resistance R_m (m^{-1})	1.0×10^{12}	0.5×10^{12}

The cake filtration theory was used to examine and explain the effect of the various components tested in suspension. The methodology consisted of following up the cumulated volume of filtrate during filtration time for given TMP at 0.25 bars without any applied turbulence. The changes in the filtered volume can be described according to the cake filtration law, in which the ratio t/V is a linear function of V :

$$\frac{t}{V} = \frac{\mu \times \alpha \times W}{2 \times \Delta P \times \Omega^2} \times V + \frac{\mu \times R_m}{\Delta P \times \Omega} \quad (1)$$

Where W macromolecule or particle deposit mass per cumulated volume of filtrate $\text{kg} \cdot \text{m}^{-3}$; ΔP transmembrane pressure Pa; R_m initial membrane resistance m^{-1} ; V cumulated volume of filtrate m^3 ; t time s; α specific resistance $\text{m} \cdot \text{kg}^{-1}$; μ dynamic viscosity $\text{Pa} \cdot \text{s}$; Ω membrane area m^2 .

Sample Analysis

To quantify the performances of separation and characterizing the feed suspension and permeate, different parameters were evaluated by using methods given in Table 5.

RESULTS

To point out the role of suspended solid concentration and salinity in membrane fouling intensity, the experiments were successively carried on with natural stored rainwater and synthetic salted water (representative of sea water). Stored rainwater (Srw) came from Prince of Songkla University reservoir. The critical filtration condition was identified by increasing the permeate flux step by step, and measuring the associated TMP value obtained for each step. Results obtained are shown in Figs. 3–5. Figure 3 presents the variation of mean TMP with permeate flux according to different air flow-rates. It can be observed that a critical flux value was

Table 5. Parameters and analytical methods

Parameters	Methods
Turbidity	Turbidity meter-HACC
Color	Spectrophotometric method (10)
pH	pH meter
NOM (humic acid)	Spectrophotometric method using humic acid as the standard solution at a wavelength of 254 nm
Particle size	Particle size analyzer-MALVERN

Water Compositions and Conditioning on Flux Enhancement

1819

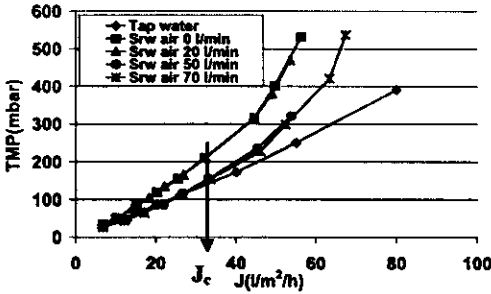


Figure 3. Influence of air flow rate on critical flux values of stored rain water (Srw: without coagulation).

maintained in the range of 30–35 l/m²/h whatever the air-flow rates. When stored rainwater was conditioned by the adding of different types of coagulants, the results clearly showed the positive effect of this conditioning (Fig. 4).

The average permeability remained close to the obtained value when filtering tap water, i.e. close to 200 l/m²/h/bar corresponding to an intensification of filtration by a factor of 2 or even 3. Results also point out the benefit of using FeCl₃ to control fouling evolution. The optimal dose determining to minimize the sludge production appeared very low, 20 mg/l in comparison with the values obtained with Alum and PACl. Furthermore, the optimal 10 mg/l dose of FeCl₃ observed in the membrane system appeared two times lower than the dose obtained in the Jar Test that pointed out the role of membrane selectivity in comparison with gravitational settling. The former only necessitates particle coagulation and the formation of small flocs, while settling necessitates the formation of larger flocs able to settle. The flocculation step appears also necessary. In addition, air injection did

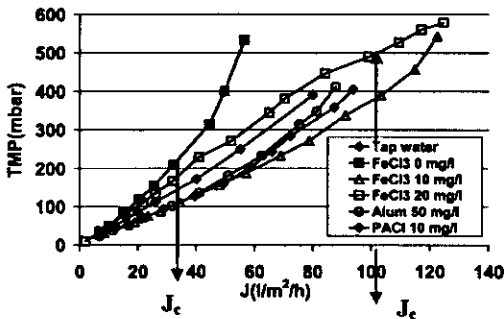


Figure 4. Influence of coagulants on critical flux of stored rain water (Srw: without aeration).

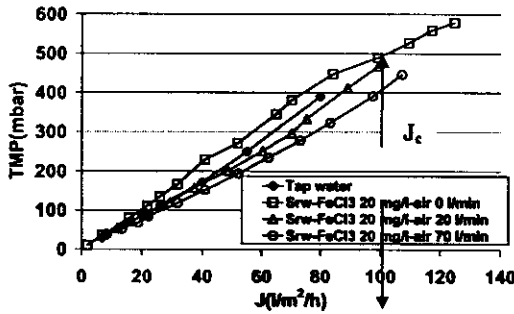


Figure 5. Influence of air flow rate on critical flux of stored rain water conditioned with optimal dose of FeCl₃.

not actually modify the intensification of permeate flux as shown in Fig. 5, illustrating results obtained with FeCl₃ conditioning.

Results obtained when filtering salted clay suspensions (Scs) are presented in Figs. 6 and 7. The salinity of salted suspension was close to the value of sea water (30 to 35 g/l) and the role of suspended particles was analyzed by adding clay powder at two concentrations—a low 0.05 g/l concentration to compare with results obtained with stored rainwater and a high 5 g/l concentration to point out the role of suspended solids. Without any conditioning, the critical flux procedure shows a lower critical flux value (20 l/m²/h) and lower membrane permeability in comparison with the value obtained with stored rainwater (Fig. 3). The suspended solids concentration in salted water does not influence the intensity of filtration. In contrast to results obtained with stored rainwater, the addition of coagulants only allowed a small increase of 20% in membrane permeability but it remained significantly favourable to the increased critical permeate flux that reached 40 l/m²/h at a high rate of

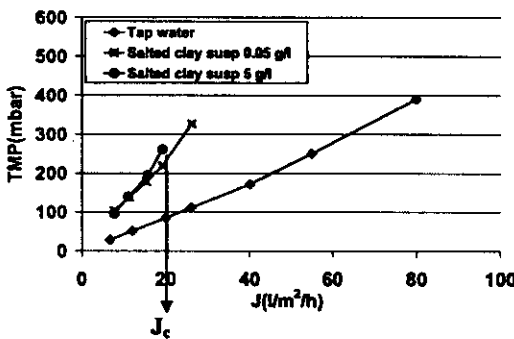


Figure 6. Critical flux determination of salted clay suspension (Scs) without coagulation).

Water Compositions and Conditioning on Flux Enhancement

1821

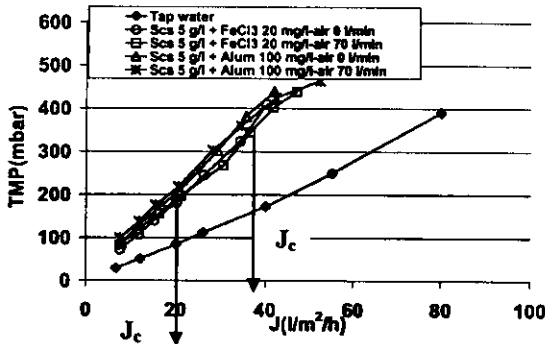


Figure 7. Influence of coagulants and air flow rate on critical flux values when filtering salted clay suspension.

aeration supplied at 70 l/min (Fig. 7). This weak impact of conditioning is probably due to the ionic strength of the salted suspension modifying the interaction between suspended solids and coagulants and the destabilizing compounds to favor less intensive particle encountering.

The filtered water showed a very high quality of water clarification with turbidity values lower than 0.5 NTU and colour values lower than 12 Pt-Co for all suspension tested.

Figures 8 and 9 show results obtained when filtering salted suspensions in frontal mode inside the specific filtration cell described in Fig. 2. To evaluate the filterability of the suspension, we suppose that the determinant step reducing membrane permeability was cake formation due to particle retention on the membrane surface. Then a specific cake hydraulic resistance (αW) may be evaluated by using cake filtration relation. The evolution of t/V vs V , in Figs. 8 and 9, allows slope calculation and (αW) deduction (t appears as the time and V the permeate volume obtained at time t).

Table 6 presents the (αW) values obtained on both porous membranes (described in Table 4) for different experimental tested conditions (clay addition and specific conditioning). As expected, the specific hydraulic resistance criteria ($\alpha \cdot W$) appeared as directly proportional to suspended particle concentration when filtration was carried out without conditioning (α being proportional to the particle concentration). Then, results pointed out the great benefit of conditioning that allowed the transformation of small particles in large flocs inducing a significant reduction of the specific resistance criteria ($\alpha \cdot W$) by a factor of 20 to 100 or more, when working with high concentrated suspensions. The relatively small values of ($\alpha \cdot W$) criteria are significant to the presence of large cake porosity and weak deposit compactness in the chosen working conditions.

When suspension conditioning occurred no significant differences appeared for ($\alpha \cdot W$) values, whatever the conditions. The presence of such

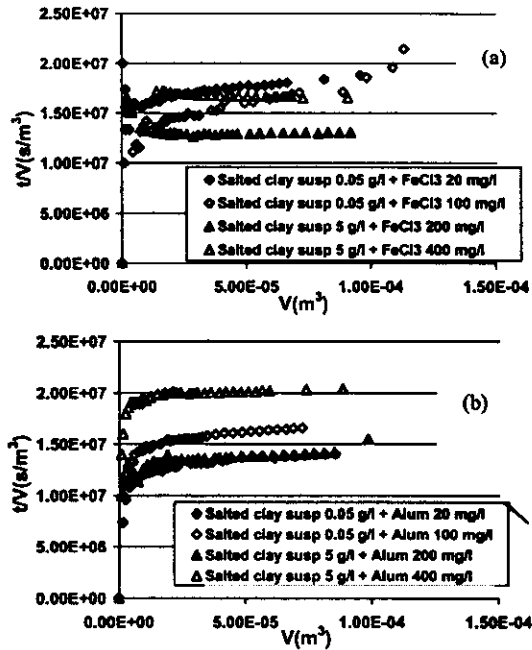


Figure 8. Evolution of filterability (t/V vs V) of salted clay suspension conditioned with $FeCl_3$ (a) and with Alum (b): membrane 0.05 micron-TMP 0.25 bar.

a cake deposit on the membrane surface may represent a dynamic layer which avoids any entry of small particles into the membrane pores, thus having a positive impact to reduce irreversible membrane fouling. In any case the membrane in cellulose ester presents lower hydraulic resistance values than nitrocellulose that can translate

- (1) the deposit cake resistance which is negligible in comparison with initial membrane resistance, two times higher for nitrocellulose, (see Table 4), and;
- (2) the importance of membrane material in fouling intensity.

These results obtained in frontal mode, point out the determining role of coagulants on specific hydraulic resistance of cake deposits. These appear in contrast to results previously obtained in immersed systems. This shows in fact that the determining fouling phenomenon in the immersed system was not an external deposit, which explains the non-influence of aeration, but more specifically, the irreversible interactions between non-flocculated soluble compounds with membrane materials.

Water Compositions and Conditioning on Flux Enhancement

1823

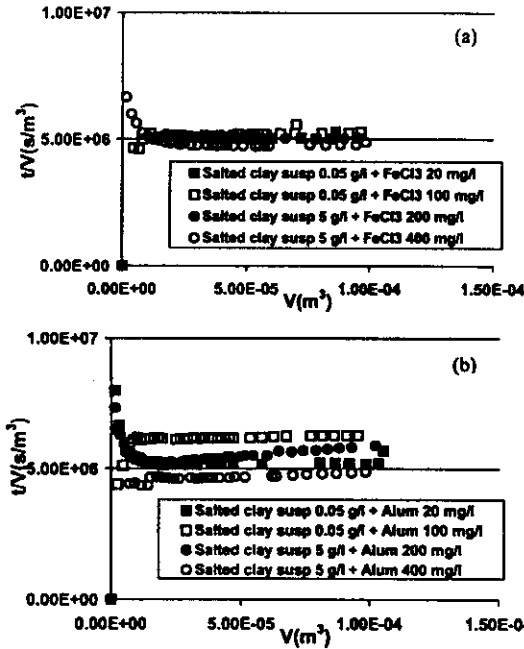


Figure 9. Evolution of filterability (t/V vs V) of salted clay suspension conditioned with FeCl₃ (a) and with alum (b): membrane 0.1 micron-TMP 0.25 bar.

Table 6. α · W values obtained from dead end filtration of conditioned stored rain-water and salted clay suspension tested at TMP 0.25 bar

Type of coagulants	α · W (× 10 ¹² m ⁻²)					
	Stored rainwater: (Srw)		Salted clay suspen- sion: (Scs) 0.05 g/l		Salted clay sus- pension: (Scs) 5.0 g/l	
	0.05 μm	0.1 μm	0.05 μm	0.1 μm	0.05 μm	0.1 μm
Without coagulants	3.4	1.7	10	1.1	110	110
FeCl ₃ = 20 mg/l	1.1	0.28	4.25	1.42	—	—
FeCl ₃ = 100 mg/l	1.1	0.34	4.96	0.71	—	—
Alum = 20 mg/l	3.4	0.5	3.54	0.71	—	—
Alum = 100 mg/l	1.1	2.5	5.66	0.71	—	—
FeCl ₃ = 200 mg/l	—	—	—	—	0.71	1.42
FeCl ₃ = 400 mg/l	—	—	—	—	3.54	0.02
Alum = 200 mg/l	—	—	—	—	2.83	0.64
Alum = 400 mg/l	—	—	—	—	4.25	0.64

CONCLUSIONS

The Immersed Membrane System appeared as an appropriate operation in order to obtain very high water clarification quality, whatever the raw water quality, even salted water, which justifies its development for water clarification and its benefits of pre-treatment upstream, a desalination step by reverse osmosis for example. In the operational conditions tested, water conditioning by FeCl_3 appeared very efficient for clarifying stored rainwater that pointed out the determining role of cake deposits when no conditioning occurred. When treating flocculated salted water, significant differences were observed when comparing frontal and tangential filtration modes. The determining role of free soluble compounds or initial membrane resistance has an effect on membrane fouling.

ACKNOWLEDGMENTS

This study was funded by the Thailand Research Fund (TRF) and Commission on Higher Education, Ministry of Education of Thailand. The budget for participating in the Particle Separation Conference was borne by the Prince of Sonkla University, Faculty of Engineering and the Membrane Science and Technology Research Center (MSTRC). The authors would also like to record their appreciation to the assistant staffs of the Department of Civil Engineering for their assistance in completing this work.

REFERENCES

1. Howell, J.A. (2004) Future of membranes and membrane reactors in green technologies and for water reuse. *Desalination*, 162: 1–11.
2. Nicolaisen, B. (2002) Developments in membrane technology for water treatment. *Desalination*, 153: 355–360.
3. Rautenbach, R. and Voßenkaul, K. (2001) Pressure driven membrane process—the answer to the need of a growing world population for quality water supply and waste water disposal. *Separation and Purification Technology*, 22–23: 193–208.
4. Lebeau, T., Lelièvre, C., Buisson, H., and Cléret, D. (1998) Immersed membrane filtration for production of drinking water: Combination with PAC for NOM and SO_2 removal. *Desalination*, 117: 219–231.
5. Schäfer, A.I., Fane, A.G., and Wait, T.D. (2001) Cost factors and Chemical Pre-treatment effects in the membrane filtration of water containing natural organic matter. *Water Research*, 35: 1509–1517.
6. Sridang, P.C., Heran, M., and Grasmick, A. (2005) Influence of module configuration and hydrodynamics in water clarification by Immersed membrane systems. *Water Science and Technology*, 51 (6–7): 135–142.
7. Sridang, P.C., Wisniewski, C., Ognier, S., and Grasmick, A. (2006) The role of the nature and composition of solutions/suspensions in fouling of plane organic

Water Compositions and Conditioning on Flux Enhancement**1825**

- membranes in frontal filtration: Application to water and wastewater clarification. *Desalination.*, 191: 71–78.
8. Chang, S. and Fane, A.G. (2001) The effect of fibre diameter on filtration and flux distribution relevance to submerged hollow fibre modules. *J. Membrane Sci.*, 184: 221–231.
 9. Field, R.W., Wu, D., Howell, J.A., and Gupta, B.B. (1995) Critical flux concept for microfiltration fouling. *J. Membrane Sci.*, 100: 259–272.
 10. APHA, AWWA, and WEF (1998) *Standard Methods for the Examination of Water and Wastewater*, 20th Edn.; Washington D.C.